

# UF800F THRU UF808F

## ISOLATION ULTRAFAST SWITCHING RECTIFIER

VOLTAGE - 50 to 800 Volts

CURRENT - 8.0 Amperes



### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency
- Low forward voltage, high current capability
- High surge capacity
- Ultra Fast recovery times high voltage

### MECHANICAL DATA

Case: ITO-220AC full molded plastic package


Terminals: Lead solderable per MIL-STD-202, Method 208

Polarity: As marked

Mounting Position: Any

Weight: 0.08 ounce, 2.24 gram

### ITO-220AC

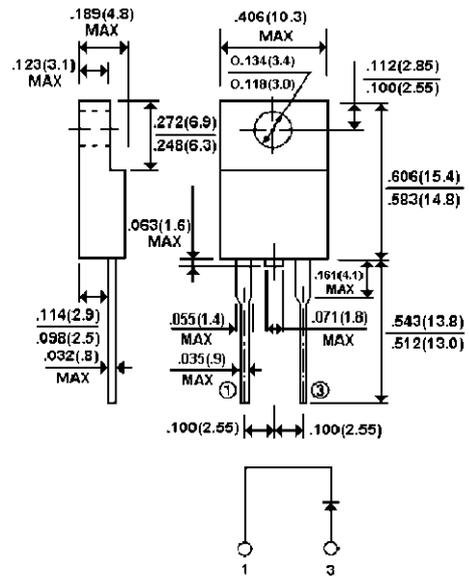

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.


For capacitive load, derate current by 20%

TYPE NUMBER	UF800F	UF801F	UF802F	UF803F	UF804F	UF806F	UF808F	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	300	400	600	800	V
Maximum RMS Voltage	35	70	140	210	280	420	560	V
Maximum DC Blocking Voltage	50	100	200	300	400	600	800	V
Maximum Average Forward Rectified Current .375"(9.5mm) lead length @ T <sub>C</sub> =100°C	8.0							A
Peak Forward Surge Current, 8.3ms single half sine wave superimposed on rated load(JEDEC method)	125							A
Maximum Instantaneous Forward Voltage at 8.0A	1.0		1.3		1.7			V
Maximum DC Reverse Current @T <sub>A</sub> =25°C	10.0							uA
at Rated DC Blocking Voltage @T <sub>A</sub> =125°C	500							uA
Maximum Reverse Recovery Time(Note 1)	50				100			ns
Typical Junction capacitance (Note 2)	80				50			pF
Typical Junction Resistance (Note 2) R <sub>θJKJA</sub>	15							°C/W
Operating and Storage Temperature Range T <sub>J</sub> , T <sub>STG</sub>	-50 to +150							°C

### NOTES:

1. Reverse Recovery Test Conditions: I<sub>F</sub>=0.5A, I<sub>R</sub>=1A, I<sub>rr</sub>=0.25A
2. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
3. Thermal resistance from junction to ambient and from junction to lead length 0.375"(9.5mm) P.C.B. mounted

RATING AND CHARACTERISTIC CURVES  
UF800F THRU UF808F

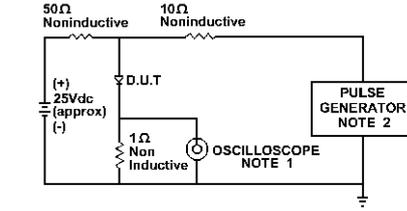

NOTE:1. Rise Time = 7ns max.  
Input Impedance = 1 megohm. 22pF  
2. Rise Time = 10ns max.  
Source Impedance = 50 Ohms




Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

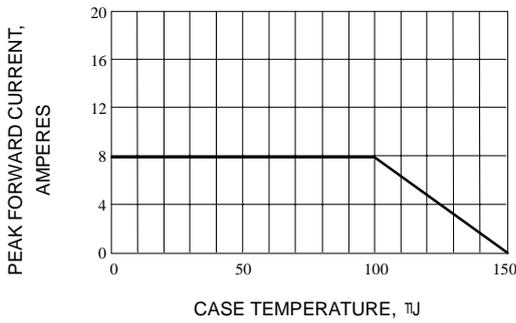


Fig. 1-TYPICAL FORWARD CURRENT DERATING CURVE

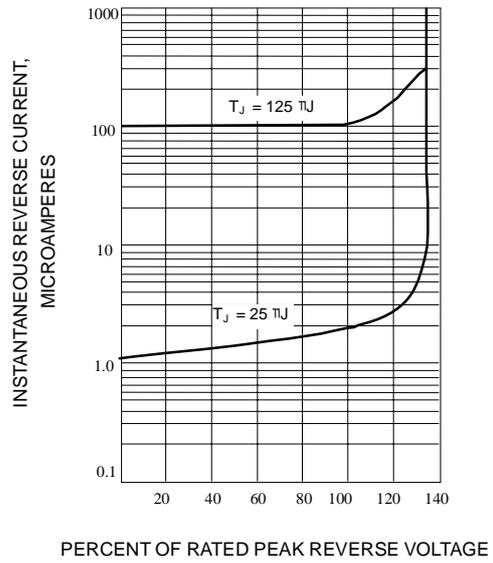


Fig. 2-TYPICAL REVERSE CHARACTERISTICS

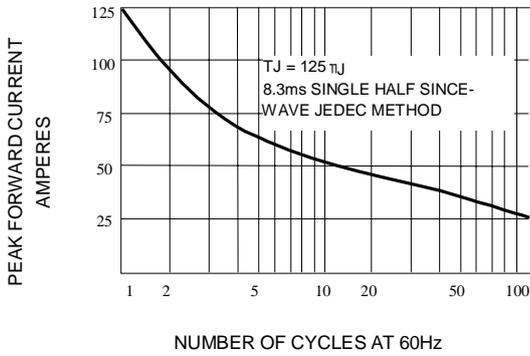


Fig. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

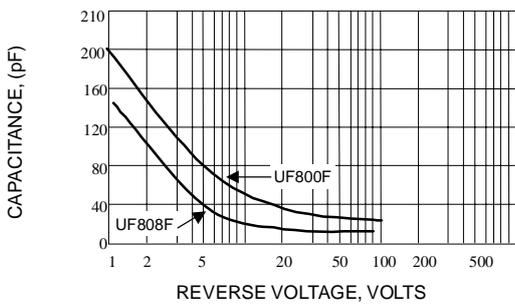


Fig. 4-TYPICAL JUNCTION CAPACITANCE

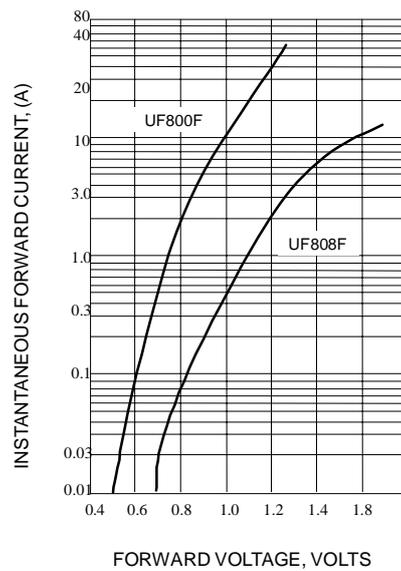


Fig. 5-PEAK FORWARD SURGE CURRENT